




IPER-CUT 1

TOP CUTTING AND POLISHING

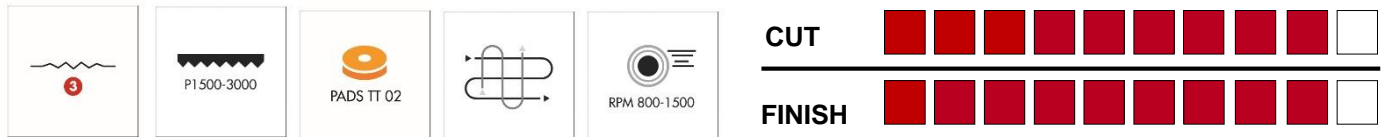

Product description

Cutting polishing compound with innovative components, used to remove marks, failing, dullness and P1500-P3000 sand scratches, according to the hardness of treated paints. It may be used both on oxidized surfaces and new well dried paints. It is quick and easy to use and need of a very small quantity, without waste of time and product. It is also used as 'One Step', since it leaves an extremely deep gloss level. It is generally applied by variable speed polisher with a medium-hard foam pad (orange)

HOW TO USE: please apply a small quantity of compound on the polisher-pad. Let the polisher turn at low revolutions and spread the product with crossed movements; then speed up the revolutions (800-1500 RPM). Pay attention at not overheating the paint. Do not overstay on the surface without adding more product. If necessary, please repeat the application more times till the complete removal of scratches. Eventually, wipe the surface with a clean cloth.

Physical properties

Colour: White or Black

Physical form: Liquid-creamy

Odour: Light and pleasant

Explosion limit: None

Flammability: Not flammable

Stability: Tested after exposure to temperatures between - 15°C e + 45°C

IMPERFECTION LEVEL (HIGH > LOW)

